

Lightweight & Water Resistant
Infill Solution




GLAZEGUARD® 250 WR

WATER RESISTANT GLAZING INFILL PANELS

FEATURES & BENEFITS

- fits standard 1/4" glazing systems
- economical, textured polyester finishes
- long-lasting, smooth Kynar 500® finishes
- anodized finishes to match storefronts
- water resistant
- polypropylene core
- can be easily cut-to-size in the field
- very low maintenance
- no minimum quantities
- quick lead time
- available in several standard sizes

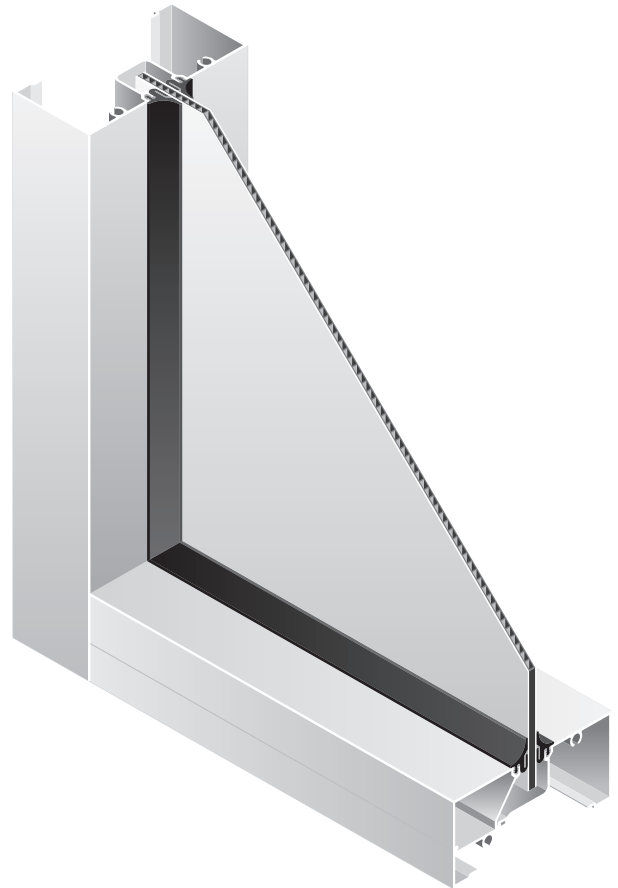


Description:

GlazeGuard® 250 WR is a composite panel with textured or smooth aluminum skins and a polypropylene substrate. Panels are furnished with a strippable film on the painted surfaces to protect the finish during shipment and installation.

Use & Application:

GlazeGuard® 250 WR is installed in aluminum glazing or storefront channels (on setting blocks) and sealed using gaskets. No fasteners or adhesives are used in the installation of the panel. Typical applications include glazing infill, modesty screens, spandrel panels, and railing inserts.

GLAZEGUARD® 250 WR

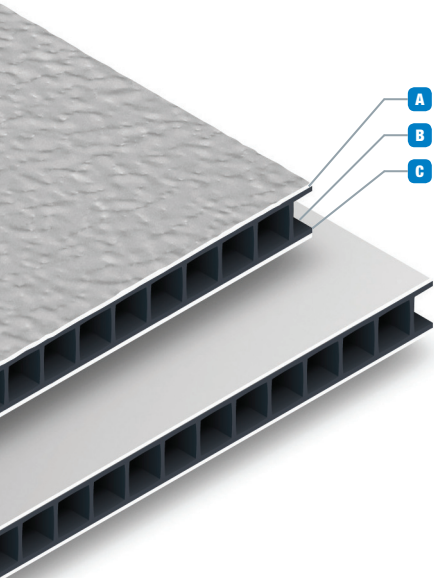

STANDARD SIZES

48" x 96"	(121.9cm x 243.8cm)
48" x 120"	(121.9cm x 304.8cm)
48" x 144"	(121.9cm x 365.8cm)
60" x 96"	(152.4cm x 243.8cm)
60" x 120"	(152.4cm x 304.8cm)
60" x 144"	(152.4cm x 365.8cm)

Cut-to-size panels are available in any increment up to 60" x 144".

WARRANTY

Panel Composition:	5 years
Polyester Finishes:	5 years
Kynar 500® Finishes:	30 years
Anodized Finishes:	20 years

RECYCLED CONTENT (BY WEIGHT)

Panels With Textured Skins

Post-Consumer:	1.2%
Post-Industrial:	17.1% to 21.1%

Panels With Smooth Skins

Post-Consumer:	0.8%
Post-Industrial:	35.2% to 37.7%

MATERIAL PROPERTIES

Component	Standard (in)	Metric (mm)
A Prefinished Textured Aluminum ¹	.010"	0.25mm
	(or) Prefinished Smooth Aluminum ¹	0.61mm
B High Density Polypropylene	.197"	5.00mm
C Prefinished Textured Aluminum ¹	.010"	0.25mm
	(or) Prefinished Smooth Aluminum ¹	0.61mm

PANEL PROPERTIES

Property	Standard (in)	Metric (mm)
Panel Weight	Textured Skins	0.61 lbs/ft ²
	Smooth Skins	1.00 lbs/ft ²
Nominal Thickness	1/4"	6mm
Thickness Tolerance	±1/32"	±0.79mm
Length & Width Tolerance	+0, -1/8"	+0, -3.18mm
Squareness	1/64" per lineal ft	
Flatness	visually flat	

FINISH PROPERTIES

Finish	Type	Coating
Textured Polyester	1-coat	0.80 mil color
Smooth Kynar 500®	2-coat PVDF (solid, mica)	0.20 mil primer + 0.80 mil color
	3-coat PVDF (metallic)	0.20 mil primer + 0.80 mil color + 0.70 mil clear
Smooth Anodized	Exterior Standard No. 1 ²	0.20 mil to 0.45 mil (depending on color)

PANEL PERFORMANCE

Property	Test	Value	Unit
Flame Spread	ASTM E84	Class A	---
R-Value	---	1.24	°F-ft ² -h/BTU
Wind Load (4' x 4' and 4' x 8' tested)	ASTM E72	varies, available upon request	

- 1 - Prefinished aluminum skins are furnished with a PVC film for protection during shipment and installation.
 2 - Class I or Class II anodizing is available as a premium custom finish. However, the warranty remains the same and fabrication difficulties will result (increased crazing, cracking) due to the increased film thickness.

Citadel Architectural Products, Inc.
 3131-A North Franklin Road
 Indianapolis, Indiana 46226
 phone (317) 894-9400 • (800) 446-8828
 fax (317) 894-6333 • (800) 247-2635
www.citadelap.com • info@citadelap.com

